



Precast Slab Railing

Safe working on lattice girder slabs

Formwork & Scaffolding.
We make it work.

Precast Slab Railing

Safe working on lattice girder slabs

The temporary guardrail provides reliable fall protection during installation of lattice girder slabs. It covers open edges of up to 2.50 m, is fixed directly to the lattice girder and locks without tools. This creates a safe working area in next to no time without interrupting the construction workflow. Tested in accordance with EN 13374.

Safety right from the start


Open edges are reliably secured while the lattice girder slabs are being installed.

Fast installation

by simply position and lock the complete guardrail unit. No tools are required, and with a unit weight of less than 25 kg it is particularly ergonomic.

Robust and durable


thanks to a sturdy, hot-dip galvanised construction

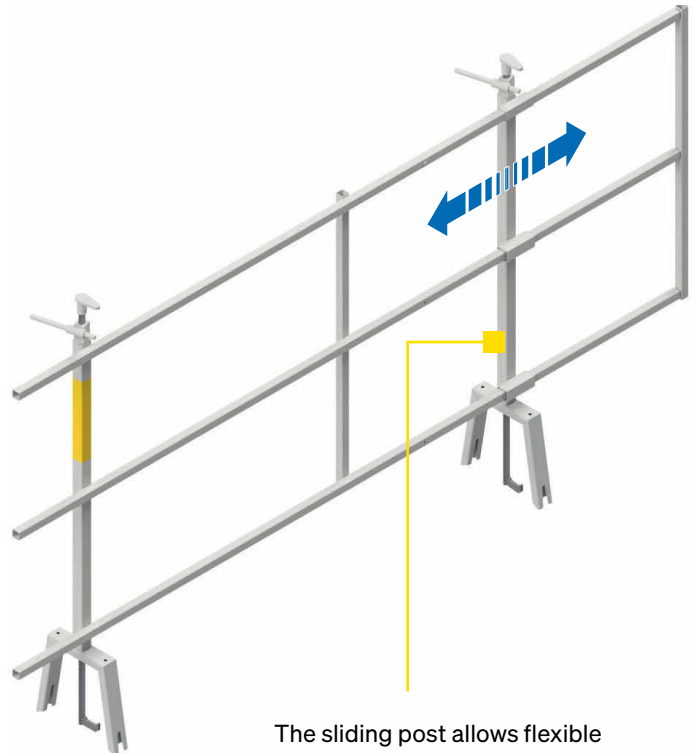

The sliding post allows flexible attachment to the corresponding node points of the lattice girders.

Technical data

Length:	2.40m
Height:	1.19m
Weight:	23.4kg
Standard:	EN 13374 Class A

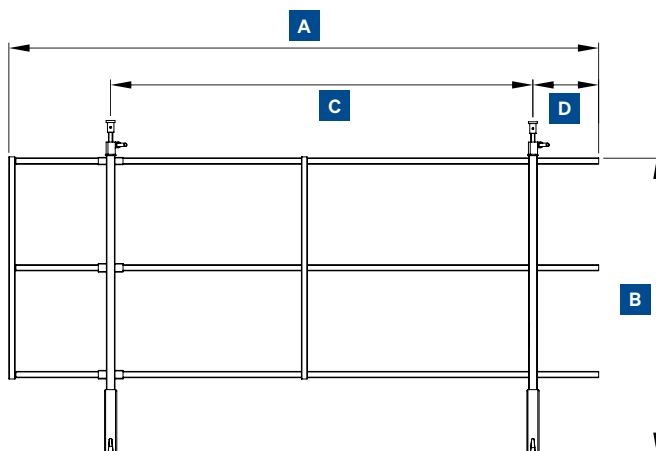

A	240cm
B	119cm
C	min. 124cm, max. 202cm
D	26.7cm
E	18-218mm (lattice girder height)



/dokacom



/doka



/company/doka



/doka_international



/doka_international