

Anchoring with Stop-anchor cone 20.0 in the slab

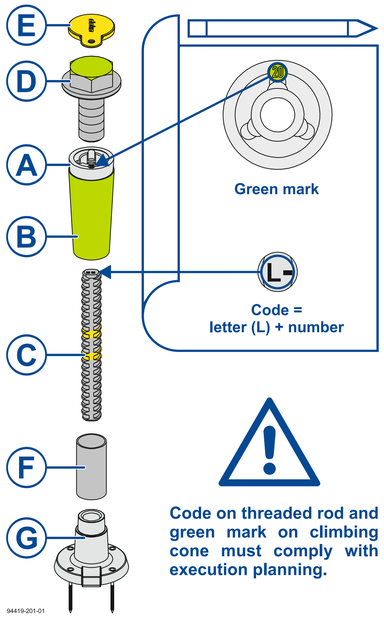


Code on threaded rod and green mark on climbing cone must comply with execution planning.


- **A** Universal climbing cone 20.0 2G
- **B** Sealing sleeve K 20.0 (green)
- **C** Threaded rod 20.0
- **D** Cone screw M30 SW50 7cm
- **E** Universal climbing-cone cover cap
- **F** Plastic tube 32mm
- **G** Stop-anchor cone 20.0

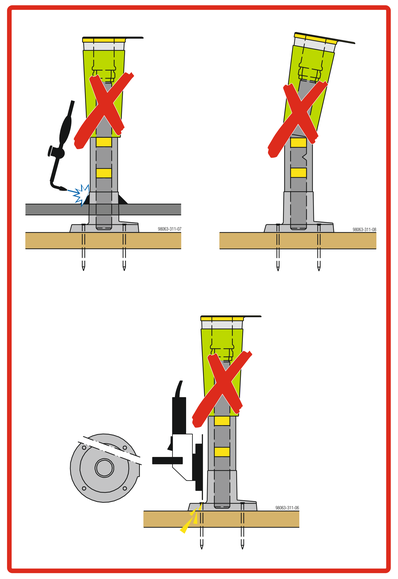


Preparing the positioning point




1.




2.




3.

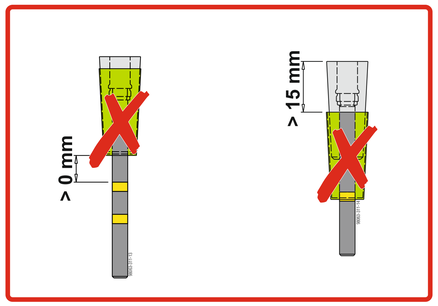


4.

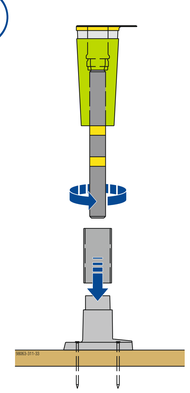




5.




Concrete

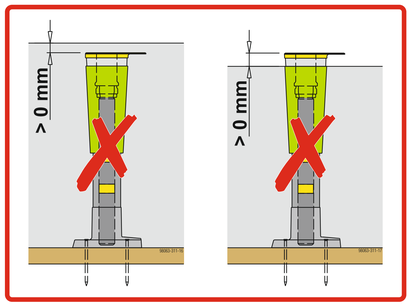


Checking the suspension point


1.

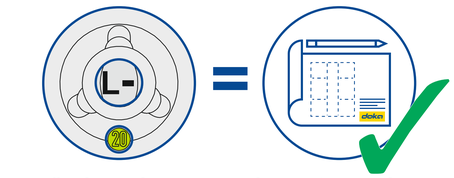

Code and green mark must comply with execution planning.




2.

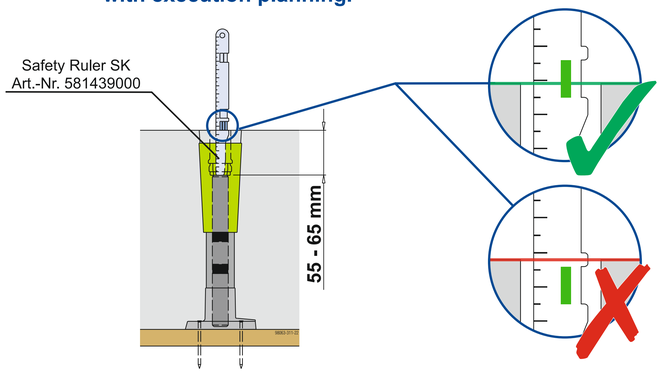

Animation

Mounting the suspension shoe

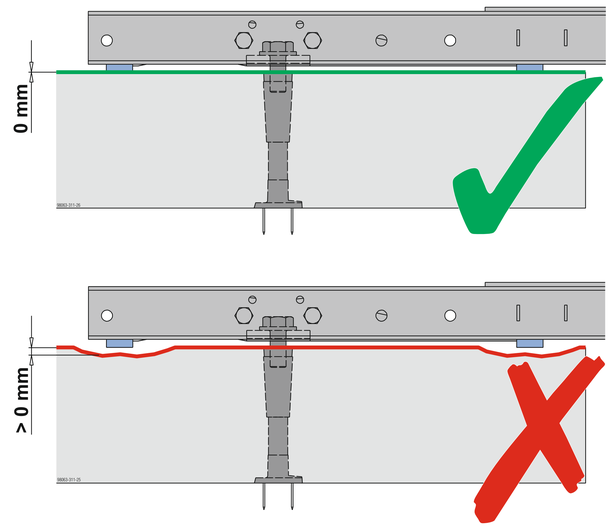

999442002 en-GB - 02/2025

Doka GmbH | Josef Umdasch Platz 1 | 3300 Amstetten | Austria | T +43 7472 605-0 | F +43 7472 66430 | info@doka.com | www.doka.com