

The Formwork Experts.


Water stop G 15.0

Art.-Nr.: 581807000

Test Report

sound insulation

16-0005L

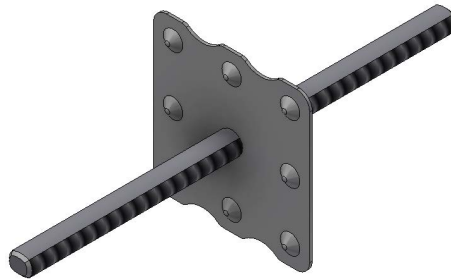

Influence of tie rod systems on the sound reduction of walls

Summary of test results and assessments based on test results

report number: 16-0005L
date: 2016-08-09
responsibility: R. Kainberger

Client: Doka GmbH
Josef Umdasch Platz 1, A-3300 Amstetten

Carried out by: TAS Bauphysik GmbH
Welserstraße 35 - 39, A-4060 Leonding

Based on: "Bauakustischer Prüfbericht" no. 25225/2016 from 2016-07-26
documented by:



Bautechnisches Institut GmbH
Karl Leitl-Straße 2
4048 Puchenu bei Linz



Topic: Sound insulation according EN ISO 10140-2

Relevant standards: EN ISO 717, part 1, "Acoustics - Rating of sound insulation in buildings and of building elements - Part 1: Airborne sound insulations" (ISO 717-1:2013); 15-6-2013

EN ISO 10140, part 1, "Laboratory measurement of sound insulation building elements - Part 1: Application rules for specific products - Amendment 2: Rainfall sound" (ISO 10140-1: 2010 + Amd2:2014) (consolidated version); 15-9-2014

EN ISO 10140, part 2, "Acoustics - Laboratory measurements of sound insulation building elements - Part 2: Measurement of airborne sound insulation (ISO 10140-2:2010), 15-11-2010

EN ISO 10140, part 4, "Acoustics - Laboratory measurement of sound insulation building elements - Part 4: Measurement procedures and requirements" (ISO 10140-4:2010), 15-11-2010

EN ISO 10140, part 5, "Acoustics - Laboratory measurement of sound insulation building elements - Part 5: Requirements for test facilities and equipment - Amendment 1: Rainfall sound" (ISO 10140-5:2010 + Amd1:2014) (consolidated version); 1-9-2014

EN ISO 3382, part 2, "Acoustics - Measurement of room acoustic parameters - Part 2: Reverberation time in ordinary rooms" (ISO 3382-2:2008 + Cor 1:2009) (consolidated version); 15-8-2009

The Summary consists of 1 page and 24 pages of various designs.
The scope is limited to these constructions and designs.

1 REPORT

Laboratory Measurement of sound insulation acc. EN ISO 10140-2

Report No. BTI: 25225
from: 2016-07-26
Measurement No.: L00 bis L14

BTI Karl Leitl-Straße 2
A-4048 Puchenu bei Linz
BAUTECHNISCHES
INSTITUT GMBH www.bti.at

2 TEST SET UP



Test wall with 10.24 m²:

The test wall is a brick wall combined with a plasterboard construction which has a sound insulation of $R_w(C;C_{tr}) = 68(-2;-6)$ dB (without influence of tie rods).

In this wall a 25 cm thick concrete element (size 1 m²) was installed which had 10 prepared bores for each tie rod system.

The measurements were always performed with 10 tie rods which is equivalent to **1 tie rod per m² of wall**.

3 TESTED TIE ROD SYSTEM

Tie rod system 15.0 - Water stop G 15.0 33 cm

This system was not measured with this test series:

Derived from other results (i.e. L12) the following result can definitely be expected:

Influence of tie rod system:

from $R_w(C;C_{tr}) = 68(-1;-5)$ dB

to $R_w(C;C_{tr}) = 68(-1;-5)$ dB


based on 1 tie rod / 1 m² wall

that means there is no influence of the tie rod system on the sound reduction of the wall

Water stop G 15.0




Can be mounted in walls with a thickness of 25 cm and above.



A Water stop G 15.0
B Anchor cone 15.0

Formwork stripped from around form-tie point



Variable dimensions:

a ... minimum wall thickness 25 cm
b ... form-tie length 13 cm where wall thickness is 25 cm
Up to a tie-rod length of 40 cm, the plate of the Water stop G 15.0 33cm must be positioned in the middle of the rod.
Where the tie-rod is between 40 cm and 150 cm long, the plate must be positioned at a fixed distance of 20 cm from the end of the tie-rod. (Varying lengths - b - can be ordered under Art.n° 580100000).

Fixed dimensions:
c ... 6 cm